



PRIORITY VALVE (PRIORITY VARIABLE TYPE) (PRIORITY RELIEF PORT TYPE)	·FP-V-R*-04-**-* TYPE	20.6 MPa
--	-----------------------	----------

• Dimensions (FP-V-R*-04)

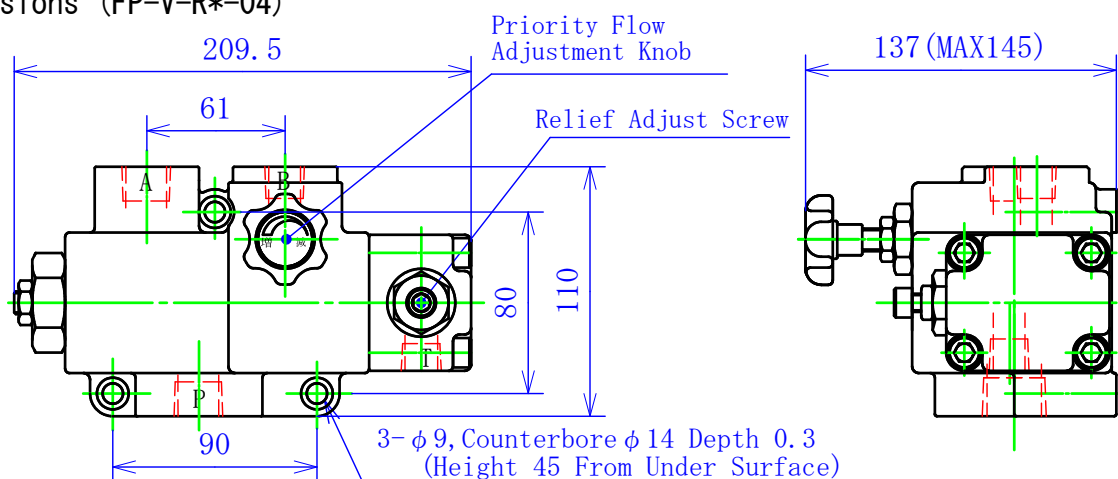

• Dimensions (FP-V-R*-08)

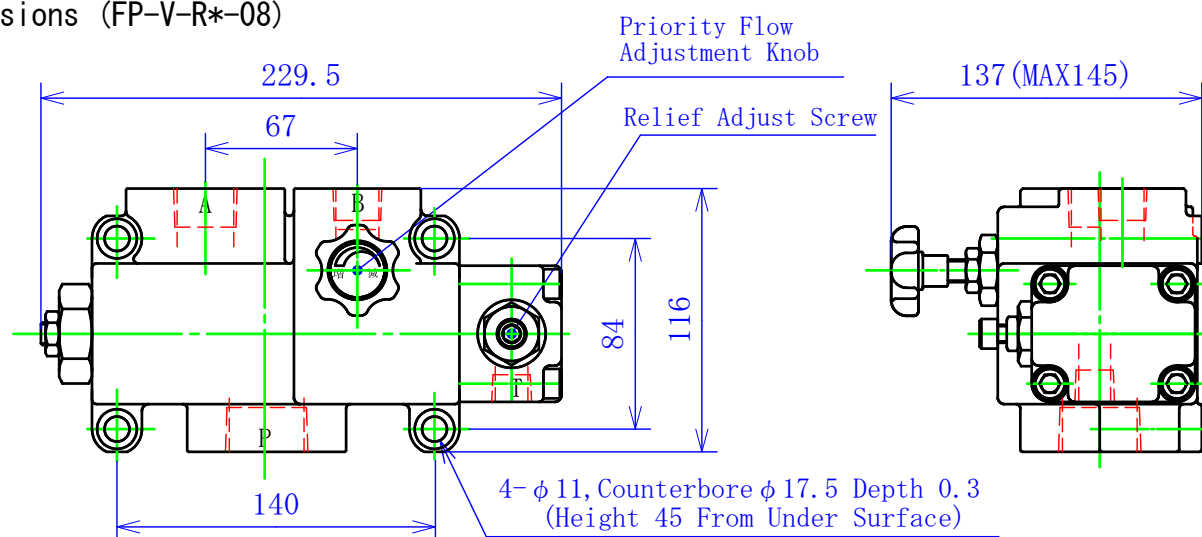

• Specification

Type			Port P	Pressure loss (MPa)	Priority flow (l/min.)	Connecting pipe (Rc, or, G)				Weight (kg)
			Standard flow (l/min.)			P	A	B	T	
FP-V	R1. 1.0~ 9.8	04	10 ~ 60	0.8±0.3	1. 3 ~ 20 2. 3 ~ 40	1/2~3/4	3/8~3/4	Rc 3/8 G 3/8~1/2	Rc 3/8	6.8
	R2. 4.9~14.7 R3. 9.8~20.6 (Only 08)	08	10 ~ 120		1. 3 ~ 20 2. 3 ~ 40 3. 3 ~ 60	3/4~ 1	3/4~ 1	1/2~3/4		8.9

• Type Method

FP - V - R* - ** - ** - *	
Priority Relief Port	Priority Flow
R1 = 1.0~ 9.8 MPa	Adjustable range
R2 = 4.9~14.7 MPa	1 = 3~20 l/min.
R3 = 9.8~20.6 MPa	2 = 3~40 l/min.
Nominal diameter (Body size)	3 = 3~60 l/min. (Only 08)
	Port P Flow

※Please inform a connection diameter at the time of an order.
By designation, we set priority flow and pressure relief quantity.